

# TK710STi

## BenQ DLP Projector



### Features

- Great Contrast Ratio of min. 600,000 : 1
- 1.2x big zoom with short-throw rate 0.69~0.83 (95"±3% @ 1.44m) for easy installation
- The wider color gamut coverage rate of Rec. 709 95%
- 2K resolution for better gaming experience
- Built-in QS02 with Netflix



### Product Specifications

<b>Product Number / EAN Code</b>	9H.JSK77.17E / 471 8755 09355 5
<b>Projection System</b>	DLP
<b>Native Resolution</b>	0.65" 4K UHD
<b>Brightness</b>	3200 ANSI Lumens
<b>Native Contrast Ratio (FOFO) *</b>	min. 1350 : 1 (Bright mode)
<b>Display Color</b>	1.07 Billion Colors
<b>Rec.709 Coverage</b>	95%
<b>Native Aspect Ratio</b>	16 : 9
<b>Light Source</b>	Laser
<b>Light Source Life **</b>	20,000 hours
<b>Throw Ratio</b>	0.69~0.83 (95"±3% @ 1.44m)
<b>Zoom Ratio</b>	1.2x
<b>Lens ***</b>	F/#=2.53~2.73, f=10.2~12.24
<b>Lens Shift</b>	N/A
<b>Keystone Adjustment</b>	3D keystone, Vertical & Horizontal & Rotation ± 30 degrees
<b>Projection Offset</b>	102.5%± 2.5%
<b>Projection Size (Clear Focus / Maximum)</b>	60"-120" / 300"
<b>Picture Mode</b>	Bright / Living room / RPG / FPS / Cinema / User / (3D) / (HDR-RPG) / (HDR-FPS) / (HDR10) / (HDR-User) / (HLG)
<b>Speaker</b>	5W treVolo x 1
<b>Resolution Support</b>	VGA (640 x 480) to 4K UHD (3840 x 2160)
<b>Horizontal Frequency</b>	15K~135KHz
<b>Vertical Scan Rate</b>	23~240Hz
<b>HDTV Compatibility</b>	480i, 480p, 576i, 567p, 720p, 1080i, 1080p, 2160p
<b>Power Consumption</b>	275 W (Max); < 0.5 W (Standby)
<b>Standby Power Consumption</b>	< 0.5W
<b>Power Supply</b>	AC 100 to 240 V, 50/60 Hz
<b>Product Dimensions (W x H x D)</b>	304.2 x 253.5 x 112.4mm (include adjustable feet)
<b>Product Weight</b>	3.1 Kg +/- 100g
<b>Acoustic Noise (Normal / Eco) (dB)</b>	31/28 dBA
<b>Operating Temperature</b>	0~40°C

#### Accessories (Standard)

Power Cord  
Quick Start Guide  
User Manual E-edition  
Remote Control  
Warranty Card  
Regulatory Statements  
ATV dongle (QS02)

#### On Screen Display Language

English / French / German / Italian / Spanish / Russian / Traditional Chinese / Simplified Chinese / Japanese / Korean / Swedish / Dutch / Turkish / Czech / Portuguese / Thai / Polish / Norwegian / Finnish / Indonesian / Arabic / Hindi (22 Languages)

\* The Contrast is measure by Full On Full Off standard.


\*\* LightSource life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.

\*\*\* All related Optical Value is measure by Standard Lens.



## Input and Output Terminals

	I/O Name	Quantity
1	HDMI (HDCP2.2)	2
2	HDMI (HDCP2.2) (Hidden)	1
3	USB Type A (1.5A power supply)	1
4	Micro USB (Hidden)	1
5	RS232	1
6	Audio Output	1

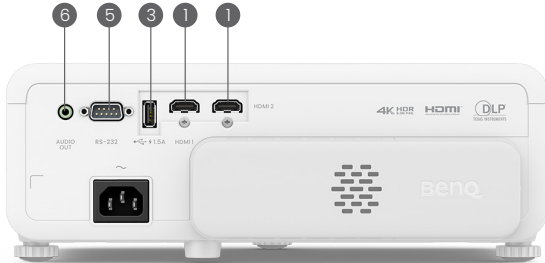


## Dimensions



## Distance Chart

Screen size				Distance from screen (mm)			Vertical offset (mm)
Diagonal	H	W	Min length (max zoom)	Average	Max length (min zoom)		
Inch	mm	(mm)	(mm)				
60	1524	747	1328	917	1009	1102	19
70	1778	872	1550	1069	1178	1286	22
80	2032	996	1771	1222	1346	1470	25
90	2286	1121	1992	1375	1514	1654	28
100	2540	1245	2214	1528	1682	1837	31
110	2794	1370	2435	1680	1851	2021	34
115	2921	1432	2546	1757	1935	2113	36
120	3048	1494	2657	1833	2019	2205	37

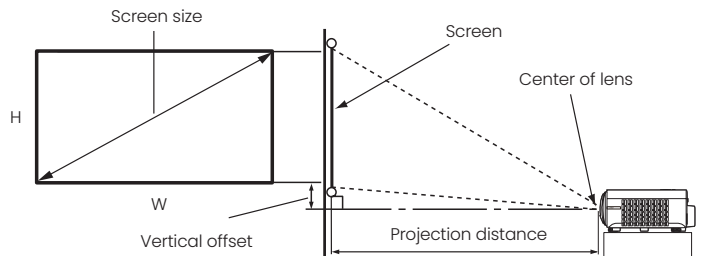

### BenQ Europe B.V.

Meerenakkerweg 1-17  
5652 AR Eindhoven  
The Netherlands  
Tel: +31 88 8889200  
Fax: +31 88 8889299

BenQ.eu

© 2024 BenQ Corp. Specification may vary by region, please visit your local stores for details. Actual products features and specifications are subject to change without notice. This material may include corporate names and trademarks of third parties which are the properties of the third parties respectively.

**BenQ**